

17" SXGA AFOLUX Panel PC

AFL-17A-915

Intel® Celeron® M 1.0GHz with 512KB L2 cache Processor

AFL-17B-915

Intel® Pentium® M 2GHz (max.)

AFL-17C-9652

Intel® Core™2 Duo T7500 2.2GHz processor (max.)

AFL-17C-HM55

Intel® Core i7-620M 2.66GHz Processor (max.)

**NEW HM55 Platform Features:**

- Powered by high performance 2.66 GHz Intel® Core i7-620M CPU with Intel® HM55 chipset
- DDR3 1066MHz system memory up to 4GB
- HDMI port delivers the high image quality on the second display
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Suggest over 4GB storage capacity)



One Key Recovery
iEi symantec

Specifications

Model	AFL-17A-915-R20	AFL-17B-915-R20	AFL-17C-9652-R20	AFL-17C-HM55-R10
LCD Size	17"			
Max Resolution	1280 x 1024			
Brightness (cd/m²)	300			
Contrast Ratio	800 : 1			
LCD Color	16.7M			
Pixel Pitch (mm)	0.264 (H) x 0.264 (V)			
Viewing Angle (H-V)	160° / 160°			
Backlight MTBF	50000 hrs			
SBC Model	AFLMB-9152-R11		AFLMB-9652-R10	AFLMB2-HM55-R10
CPU	Intel® Celeron® M process 1Gz with 512KB L2Cache processor CPU	Intel® Pentium® M process (up to 2.0GHz) processor CPU Intel® Celeron M process CPU	Intel® Celeron® M550 2.0GHz CPU Intel® Core™ 2 Duo T7500 2.2GHz CPU	Socket G (PGA989) Intel® Arrondale processor
Chipset	Intel® 915 GME		Intel® GME965 Chipset	Intel® HM55
RAM	Supports two 400MHz or 533MHz DDRII SO-DIMM (2GB Max.)		Supports two 400MHz DDRII SO-DIMM (4GB Max.)	Two 204-pin 800/1066 DDR3 dual-channel SODIMMs supported (system max. 4GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch		1 x Reset Button 1 x External SATA 1 x Audio Port 1 x VGA Port 1 x Power Jack	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port (Line-Out) 1 x VGA 1 x Power Jack 1 x HDMI Port
SSD	CF Typell			
Watchdog Timer	Software programmable supports 1~255 sec. System reset			
Audio	AMP 1.5W + 1.5W(internal speaker)	AMP 3W + 3W(internal speaker)	AMP 3W + 3W(internal speaker)	AMP 3W + 3W (Internal speaker)
Expansion	1 x Wireless Lan 802.11 b/g Module (internal PCIe mini card interface) 1 x Bluetooth Function (internal USB interface, Bluetooth V2.0)			1 x Wireless Lan 802.11 b / g / n Module (internal PCIe Mini card interface) 1 x Bluetooth Function (internal USB interface, Bluetooth V2.1+EDR)
Drive Bay	1 x 2.5" SATA HDD bay			
Optional HSUPA Module	N/A	1 x HSUPA Mobile Module (USB Interface)		
Construction Front Panel	ABS + PC Plastic front frame			
Membrane Keypad	N/A		LCD On/Off, Brightness Up/Down, Volume Up/Down (5 keys)	
LED Function	1 x Power ON/OFF LED on Front Panel			1 x LED on Front Panel for Power ON/OFF
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm			VESA 100 x 100mm
Front Panel Color	Sliver (877U) & Gray (ABSA2037)			Sliver (877U) & Gray (ABSA2037)
Dimension (WxHxD) (mm)	428 x 350 x 65	428 x 350 x 76	428 x 350 x 76	428 x 350 x 76
Operation Temperature (°C)	0~45°C with CF card or SATA interface 2.5" SSD HDD / 0~40°C with SATA 2.5" HDD			0~45°C with CF card or SATA interface 2.5" SSD HDD / 0~40°C with SATA 2.5" HDD
Storage Temperayure (°C)	-20°C ~60°C			
N/G Weight	5 Kg	5.8 Kg	5.8 Kg	6.0Kg
IP Level	Front Frame IP64			
Safety & EMC	CE / FCC / CB / CCC			
Touch Screen	Resistive Type 5-Wire (Touch controller IC is on board) or Capacitive type touch screen without HDD bay			
Power Adapter	P/N: 63000-FSP084DMBA1308-RS / 84W Power Adapter Input: 90VAC~264VAC, 50/60Hz / Output: 12VDC		P/N: 63000-FSP096AHB-RS / 96W Power Adapter Input: 90VAC~264VAC, 50/60Hz / Output: 12VDC	
Power Requirement	12VDC			
Power Consumption	61W	80W	86W (Intel® T7500, 2GB memory, 80G HDD)	90W



AFL-17D-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-17D-GM45

Intel® Core™2 Duo T9400 2.53GHz Processor (max.)




(For GM45 Systems)

**Specifications**


Model	AFL-17D-N270-R20 Fanless	AFL-17D-GM45-R20
LCD Size	17"	
Max Resolution	1280 x 1024	
Brightness (cd/m²)	300	
Contrast Ratio	800 : 1	
LCD Color	16.7M	
Pixel Pitch (mm)	0.264(H) x 0.264(V)	
Viewing Angle (H-V)	160° / 160°	
Backlight MTBF	50000 hrs	
SBC Model	AFLMB2-N270-R10	AFLMB2-GM45-R10
CPU	Intel® Atom™ process N270 1.6GHz CPU	Intel® Celeron® M 575 2.0GHz CPU Intel® Core™ 2 Duo P8400 2.26GHz CPU Intel® Core™ 2 Duo T9400 2.53GHz CPU
Chipset	Intel® 945GSE + ICH7M	
RAM	Supports one 400MHz or 533MHz DDRII SO-DIMM (2GB Max.)	Supports two 667MHz or 800MHz DDRII SO-DIMM(4GB max.)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch	1 x RS-232 COM Port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch
SSD	CF Typell	
Watchdog Timer	Software programmable supports 1~255 sec. System reset	
Audio	AMP 3W + 3W(internal speaker)	
Camera Module	300K pixel with Digital Microphone	
Expansion	1 x Wireless Lan 802.11 b/g Module (internal PCIe mini card interface) 1 x Bluetooth Function (internal USB interface, Bluetooth V2.0)	1 x Wireless Lan 802.11 b/g/n Module (internal PCIe mini card interface) 1 x Bluetooth Function (internal USB interface, Bluetooth V2.0)
Drive Bay	1 x 2.5" SATA HDD bay, 1 x Slim Type CD-ROM bay	
Optional HSUPA Module (support GSM 850, EGSM 900, DCS 1800 & 1900)	1 x HSUPA Mobile Module (USB Interface)	
Construction Front Panel	ABS + PC Plastic front frame	
Membrane Keypad	LCD On/Off, Brightness Up/Down, Volume Up/Down (5 keys)	
LED Function	1 x Power ON/OFF LED on Front Panel	
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm	
Front Panel Color	Black C	
Dimension (WxHxD) (mm)	410 x 349 x 83	
Operation Temperature (°C)	0°C ~40°C with SATA HDD -10°C ~50°C With CF Card or SATA interface 2.5" SSD HDD	0°C ~40°C With HDD 0°C ~45°C With CF Card or SATA interface 2.5" SSD HDD
Storage Temperature (°C)	-20°C ~60°C	
N/G Weight	6.2 Kg	
IP Level	Front Frame IP64	
Safety & EMC	CE / FCC / CB / CCC	
Touch Screen	Resistive Type 5-Wire (Touch controller IC is on board) or Capacitive type touch screen without HDD bay	
Power Adapter	P/N: 63000-FSP084DMBA1308-RS 84W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP150AHAN1808-RS 150W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC	
Power Consumption	58W	90W

Fully Integrated I/O


• AFL-17A-915

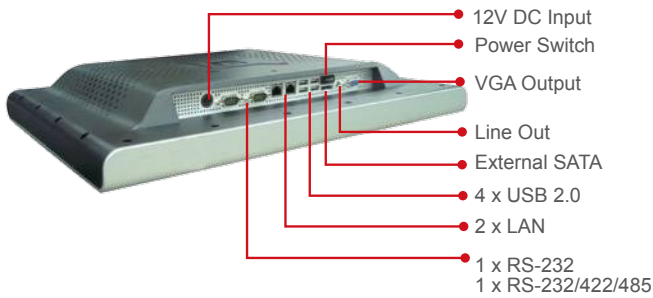


• AFL-17C-9652 / AFL-17B-915

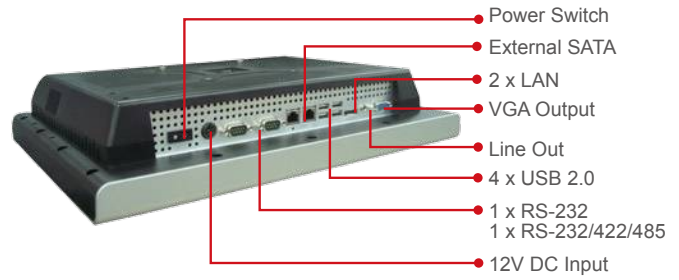




• AFL-17D-N270/AFL-17D-GM45

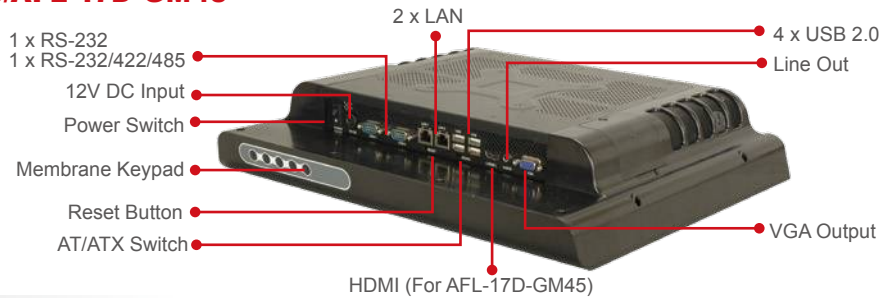





Dimensions (Unit: mm)

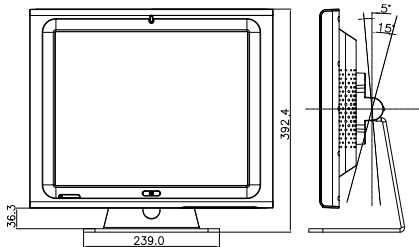


AFL-17A

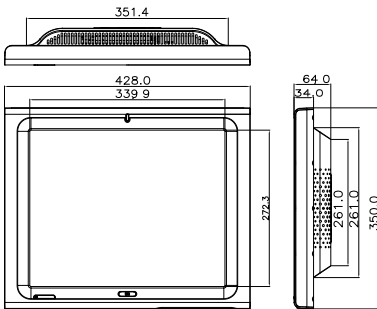

AFL-17B/17C

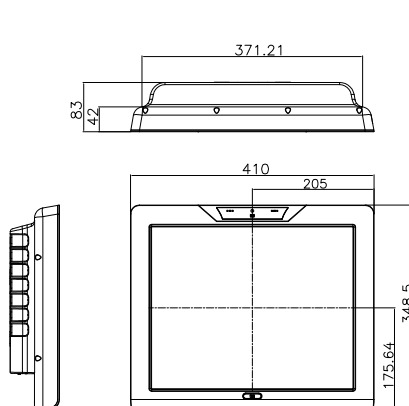

AFL-17D

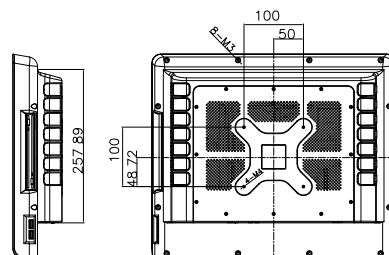

Ordering Information

Part Number	Description
AFL-17D-N270/R**(H)/1G-R20	17" 300cd/m ² SXGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, 300K camera, microphone, R20, RoHS
AFL-17D-N270/R**(H)D/1G-R20	17" 300cd/m ² SXGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11 b/g WiFi, touch screen, Bluetooth, 300K camera, microphone, DVD-COMBO, R20, RoHS
AFL-17A-915-10G/R/1G-R20	17" 300cd/m ² SXGA fanless panel PC w/ Celeron® M 1.0GHz 512K cache CPU, DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, R20, RoHS
AFL-17B-915-PM16/R**(H)/1G-R20	17" 300cd/m ² SXGA panel PC w/ Pentium® M 1.6GHz CPU, 1GB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, R20, RoHS
AFL-17B-915-CM37/R**(H)/1G-R20	17" 300cd/m ² SXGA panel PC w/ Celeron® M 1.5GHz CPU, 1GB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, R20, RoHS
AFL-17C-9652-CM55/R**(H)/1G-R20	17" 300cd/m ² SXGA panel PC with Celeron® M 550 2.0GHz CPU, 1GB DDR2 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, R20, RoHS
AFL-17C-9652-T75/R**(H)/2G-R20	17" 300cd/m ² SXGA panel PC with Intel® Core™2 Dou T7500 2.2GHz CPU, 2GB DDR2 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, R20, RoHS
AFL-17D-GM45-CM57/R**(H)/1G-R20	17" 300cd/m ² SXGA panel PC with Celeron® M 2.0GHz CPU, 1GB DDR2 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, 300K camera, microphone, R20, RoHS
AFL-17D-GM45-P84/R**(H)/2G-R20	17" 300cd/m ² SXGA panel PC with Intel® Core™2 Dou P8400 2.26GHz CPU, 2GB DDR2 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, 300K camera, microphone, R20, RoHS
AFL-17D-GM45-T94/R**(H)/2G-R20	17" 300cd/m ² SXGA panel PC with Intel® Core™2 Dou T9400 2.53GHz CPU, 2GB DDR2 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, 300K camera, microphone, R20, RoHS
AFL-17D-GM45-CM57/R**(H)D/1G-R20	17" 300cd/m ² SXGA panel PC with Celeron® M 2.0GHz CPU, 1GB DDR2 RAM, 802.11 b/g/n WiFi, touch screen, Bluetooth, 300K camera, microphone, DVD-COMBO, R20, RoHS
AFL-17D-GM45-P84/R**(H)D/2G-R20	17" 300cd/m ² SXGA panel PC with Intel® Core™2 Dou P8400 2.26GHz CPU, 2GB DDR2 RAM, 802.11 b/g/n WiFi, touch screen, Bluetooth, 300K camera, microphone, DVD-COMBO, R20, RoHS
AFL-17D-GM45-T94/R**(H)D/2G-R20	17" 300cd/m ² SXGA panel PC with Intel® Core™2 Dou T9400 2.53GHz CPU, 2GB DDR2 RAM, 802.11 b/g/n WiFi, touch screen, Bluetooth, 300K camera, microphone, DVD-COMBO, R20, RoHS
AFL-17C-HM55I5/R**(H)/2G-R10	17" 300cd/m ² SXGA panel PC with Intel® Core™ i5-520M 2.4G CPU, 2GB DDR3 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, R10, RoHS
AFL-17C-HM55I7/R**(H)/2G-R10	17" 300cd/m ² SXGA panel PC with Intel® Core™ i7-620M 2.66G CPU, 2GB DDR3 RAM, 802.11 b/g/n wireless module, touch screen, Bluetooth, R10, RoHS

Note: WiFi 802.11 draft N is upgradable.

ISMM Support Functions

	Voltage	Fan	Smart Fan	Temperature	WDT
AFL-17A(B)-915	V	V	V	V	V
AFL-17C-9652	V	V	V	V	V
AFL-17C-HM55	V	V	V	V	V
AFL-17D-N270	V			V	V
AFL-17D-GM45	V	V	V	V	V

Packing List

Item	Part Number	Q'ty	Specification
Screws Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP084DMBA1308-RS 63000-FSP096AHB-RS 63000-FSP150AHAN1808-RS	1	90~264V AC; 12V DC; 84W (17A-915, 17D-N270) 90~264V AC; 12V DC; 96W (17B-915, 17C-9652) 90~264V AC; 12V DC; 150W (17C-HM55 / 17D-GM45)
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utilities CD	7B000-000087-RS	1	
Touch Pen	XTR104-0002-RS	1	

Options

Model	AFL-17D-N270	AFL-17A-915	AFL-17B-915	AFL-17C-9652	AFL-17C-HM55	AFL-17D-GM45
Panel mounting kit	AFLPK-17D	AFLPK-17		AFLPK-17B		AFLPK-17D
Wall mounting kit				AFLWK-19		
Rack mounting kit	AFLRK-17D	AFLRK-17		AFLRK-17B		AFLRK-17D
ARM				ARM-11-RS / ARM-31-RS		
Stand				STAND-A19, STAND-B19, STAND-210-R11		
OS: Win CE 5.0 (128 MB CF card)	N/A	AFLCF-17-915-CE-R11		N/A		N/A
OS: Win CE 6.0 (128 MB CF card)	AFLCF-17-N270-CE060-R10	AFLCF-17-915-CE060-R11		N/A		N/A
OS: Win XPE (1 GB CF card)	AFLCF-17-N270-XPE-R10	AFLCF-17-915-XPE-R11		AFLCF-17-9652-XPE	AFLCF-17-HM55-XPE-R10	AFLCF-17-GM45-XPE-R10
OS: LINUX (2 GB CF card)	AFLCF-17-N270-LNX-R10	AFLCF-17-915-LNX-R10		AFLCF-17-9652-LNX-R10	AFLCF-17-HM55-LNX-R10	AFLCF-17-GM45-LNX-R10
Hybrid Card Reader	N/A	AFLP-17AMSI-U		AFLP-17BMSI-U		N/A
Magnetic Stripe Reader	N/A	AFLP-17AMSR-U		AFLP-17BMSR-U		N/A
DC 12V Input UPS		AUPS-B10-R10 (VESA 100, DC 12V input, 12V output 100W UPS module with 3800mAh)				
DC 9~36V Input UPS		AUPS-B20-R10 (VESA 100, DC 9~36V input, 12V output 100W UPS module with 3800mAh)				

Note: Win CE application without digital microphone function