



Sunlight Readable LCD!



Feature:


20.1", SVGA, 1000 nits, 16ms

Target customer:

Kiosk, POI, Ticketing, Advertising, Gaming, Industrial Computing, Signage, Public, Health Application, LCD TV

Options:

LH2011 (w/AD Board, VGA, S-Video, AV option)

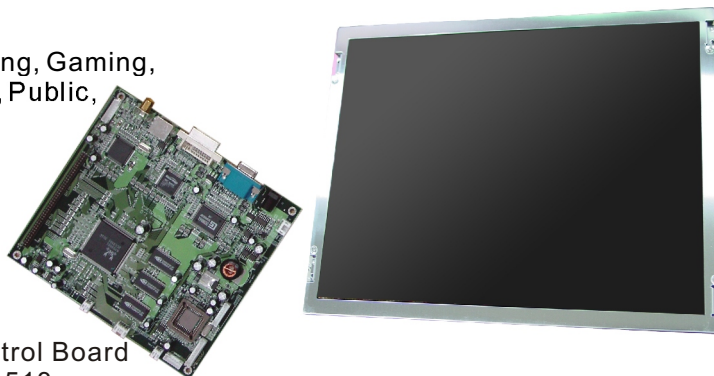

Control Board
LM1513

LF/LH2011(AU A201SN01)

Model No.	LF2011	LH2011
LCD Display	20.1" TFT Active Matrix Panel	20.1" TFT Active Matrix Panel
Brightness	1000 cd/m ²	1000 cd/m ²
Pixel Pitch(mm)	0.51(H) x 0.51(V)	0.51(H) x 0.51(V)
Max. Resolution	800x 600	800x 600
Contrast Ratio	500	500
Display Area	408 x 306mm	408 x 306mm
Response Time(Typ.)	16ms(Typ.)	16ms(Typ.)
Display Colors	262,144 colors	262,144 colors
Viewing Angle	+85°~-85°(H), +85°~-80°(V)	+85°~-85°(H), +85°~-80°(V)
Video		RGB Analog 0.7V Peak to Peak
Sync		TTL Positive or Negative
Signal Connector		15 Pin D-sub, 29 Pin DVI
F/ R Control Button		Power Switch, Menu, Select (+, -), Source Key
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
S-video / AV connector		Standard
Power Consumption	66W	68W
Dimensions (mm)	448x347x28	448x347x28
Weight (Net)	2.48kg	2.74kg
Inverter	LI3801	LI3801
Control Board		LM1513

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.