

PCISA-3717EVT

PCISA bus Socket-370 SBC

with LAN, Audio, Dual VGA or VGA & TV Output

Support Dual VGA Outputs or
One VGA and One TV Output!!



SPECIFICATIONS

- **CPU:** Socket-370 base supports Celeron™ /Pentium® III up to 133MHz FSB
- **BIOS:** Award PnP BIOS
- **System Chipset:** SiS630
- **System Memory:** One 168-pin DIMM sockets up to 512MB
- **Display:**
 - Integrated in SiS630 Chipset
 - Bus: AGP 66MHz
 - V-RAM: Share with system memory up to 64MB RAM
 - Resolution: 1600 x 1200 (16-bit colors)
 - Connector: DB-15 for CRT display
 - TV output: support NTSC and PAL signal
- **Ethernet:** 10/100Mbps by SiS630 Chipset
- **SSD:** Support CompactFlash Type II Socket (rear side)
- **Audio :** AC'97 compliant Audio CODEC
- **I/O:**
 - 2 x RS-232 serial port (16C550 UARTs compatible)
 - 1 x parallel port (SPP/EPP/ECP)
 - 2 x USB 1.1 (Pin header)
 - 1 x IrDA (SIR)
 - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function
 - 1 x ATA-100 IDE channels
- **Hardware monitoring system**
- **WDT:** software programmable, support 1~ 255 sec. system reset
- **Support ATX power control function**
- **Power Consumption:** 5V@6A, 12V @170mA (Pentium® III 500MHz CPU and 512MB SDRAM)
- **Interface:** PCISA golden edge with PCI & ISA (bus master limited performance)
- **Operating Temp:** 0°~60°C (CPU needs cooler)
- **Relative Humidity:** 5~95%, non-condensing
- **GW:** 700g




VGA No.1



VGA No.2



VGA



TV

or

Best Solution for POS,
Video Conference, Video
on Demand Application!!


ORDERING INFORMATION

- **PCISA-3717EVT** PCISA bus Socket-370 Base CPU Card with LAN, Audio, Dual VGA or VGA & TV Output
- **CB-USB02** Dual ports USB cable with bracket

PCISA-3716E2V

with Dual 10/100Mbps LAN, Audio, VGA

133MHz
FSB

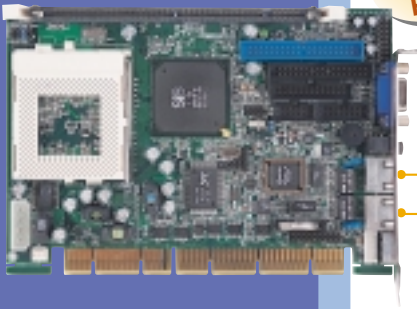

Dual 10/
100Mbps
Ethernet

SPECIFICATIONS

- **CPU:** Socket-370 base supports Celeron™ /Pentium® III up to 133MHz FSB
- **BIOS:** Award PnP BIOS
- **System Chipset:** SiS630E
- **System Memory:** One 168-pin DIMM sockets up to 512MB
- **Display:**
 - Integrated in SiS630E Chipset
 - Bus: AGP 66MHz
 - V-RAM: Share with system memory up to 64MB RAM
 - Resolution: 1600 x 1200 (16-bit colors)
 - Connector: DB-15 for CRT display
- **Ethernet:** Dual Ethernet with one integrated in chipset and one Realtek 8139C
- **SSD:** Support CompactFlash Type II Socket (rear side)
- **Audio :** AC'97 compliant Audio CODEC with 6W Amplifier (option)
- **I/O:**
 - 2 x RS-232 serial port (16C550 UARTs compatible)
 - 1 x parallel port (SPP/EPP/ECP)
 - 2 x USB 1.1 (Pin header)
 - 1 x IrDA (SIR)
 - 1 x FDD port, support 1.44MB, 2.88MB, 3-mode function
 - 1 x ATA-100 IDE channels
- **WDT:** software programmable, support 1~ 255 sec. system reset
- **Support ATX power control function**
- **Power Consumption:** 5V@6A, 12V@170mA (Pentium® III 500MHz CPU and 512MB SDRAM)
- **Operating Temp:** 0°~60°C (CPU needs cooler)
- **Relative Humidity:** 5~95%, non-condensing
- **GW:** 700g

ORDERING INFORMATION

- **PCISA-3716E2V**
PCISA Socket-370 SBC with VGA, Audio & Dual Ethernet
- **PCISA-3716EV**
PCISA Socket-370 SBC with VGA, Audio & Ethernet
- **CB-USB02** Dual ports USB cable with bracket

PCISA™
BUS